

Small turning radius and super light steering system

LOW LIFT TRUCK

JHA30



省力化に最適

Energy Saver



電動パワーステアリング

Electric Power Steering System



小さな旋回半径

Suitable for Compact area



**ハイスピードで
大きなエリアにも最適**

Jogging speed, suitable for
large warehouse and
big supermarket.



最大荷重
Maximum load

3,000kg 3,000kg

充電時間
Charging time

約8時間 8 hours

稼働時間
Operating time

約2時間 2 hours

※ コレック20mパターンサイクル稼働率100%

Note: In case of 100% operation
in KOLEC's 20 m pattern cycle.



AC制御システム
AC control system

無段階変速
Seamless speed control




N K C
Nakanishi Metal Works Co., Ltd.

KOLEC

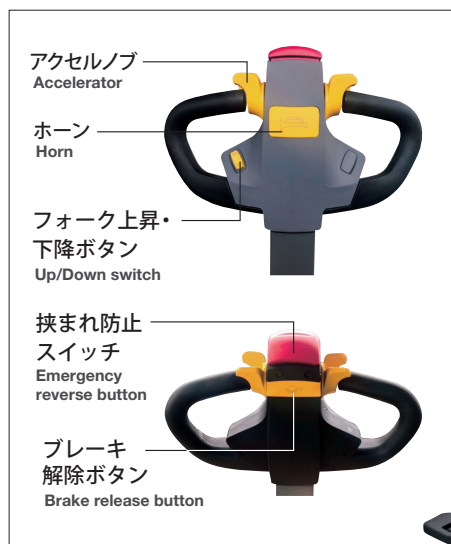

アワメーター／
バッテリー残量計
Hour meter/
Battery fuel gauge



非常停止ボタン
Emergency power
disconnect switch





挟まれ防止スイッチ
Emergency reverse button

オペレーターが壁などに挟まれた時、挟まれ防止スイッチに触ると、逆発進し挟まれ事故を防止します。



ガードとステップは、
折りたためます。

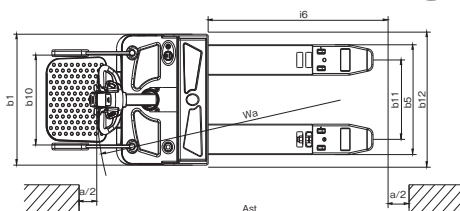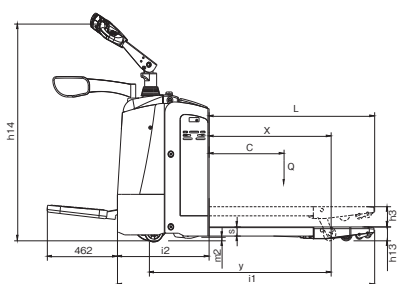

Characteristics	Driving mode		Motor driving
	Drive mode		Stand
	Rated load	Q(kg)	3000
	Load center distance	c(mm)	600
	Front overhang	x(mm)	914/964/1034
	Tread	Y(mm)	1286/1336/1406
Weight	Service weight(with battery)	kg	820
	Axle load, front/rear, laden	kg	1720/2100
	Axle load, front/rear, unladen	kg	660/160
Wheel chassis	Wheels		PU
	Wheel dimension, front		Φ250×80
	Wheel dimension, rear		Φ82×126(98)
	Additional wheel(dimension)		Φ127×57
	Wheel number, front/rear (x = driving wheel)		1X+2/2(4)
	Tread, front	b10(mm)	537
Dimension	Tread, rear	b11(mm)	340/370/470/505
	Lift height	h3(mm)	120
	Min. /Max. height of operation handle, in driving position.	h14(mm)	1050/1450
	Height, lowered	h13(mm)	82
	Overall length	i1(mm)	1785/1835/1905

Dimension	Length to fork face	i2(mm)	685
	Overall width of truck body	b1(mm)	775
	Fork dimension	S/e/l(mm)	54×180×1100 (1150/1220)
	Overall width of fork	b5(mm)	520/550/650/685
	Wheelbase ground distance	m2(mm)	28
	Aisle width, with pallet 1000x1200 crosswise	Ast(mm)	2435/2480/2550
Performance Data	Aisle width, with pallet 800x1200 lengthwise	Ast(mm)	2320/2345/2380
	Turning radius	Wa(mm)	1625/1675/1745
	Traveling speed, laden/unladen	Km/h	7/7
	Lifting speed, laden/unladen	m/s	0.039/0.056
	Descending speed, laden/ unladen	m/s	0.064/0.05
	gradeability, laden/unladen	%	8/20
Motor	Traveling brake		Electromagnetic
	Driving motor power	kW	2.2
	Lifting motor power	kW	2.2
	Battery voltage/rated capacity	V/Ah	24/280
	Battery weight	Kg	275
	Battery dimension(LXWXH)	mm	650X247X535
Noise	Noise level at operator's ear, according to DIN12053	dB(A)	70

For product inquiries, please visit our website at <http://www.kolec.co.jp/en/> or contact below:



Nakanishi Metal Works Co.,Ltd.

NAKANISHI CONVEYORS ENGINEERING (M) SDN.BHD.

Lot 558, Jalan Subang 3, Sungai Penaga industrial park,
47610 Subang Jaya, Selangor Darul Ehsan, Malaysia.
TEL: 03-5638 1909/1910 FAX: 03-5635 1913
H/P: 012-918 1233
E-Mail: kolec@nkc.com.my / wang@nkc.com.my

Nakanishi Metal Works Co.,Ltd Head Office

3-3-5 Tenmabashi, Kita-ku, Osaka 530-8566
TEL: +81-6-6351-3280 FAX: +81-6-6351-8365

Shiga Plant/Parts Center

4 Hie-cho, Konan-shi, Shiga 520-3203
TEL: +81-748-75-7846 FAX: +81-748-75-7840



KOLEC is a brand of the material handling devices of
Nakanishi Metal Works Co., Ltd.

For inquiries, contact the dealer indicated below.



<http://www.kolec.co.jp/en/>